


# FP-2000

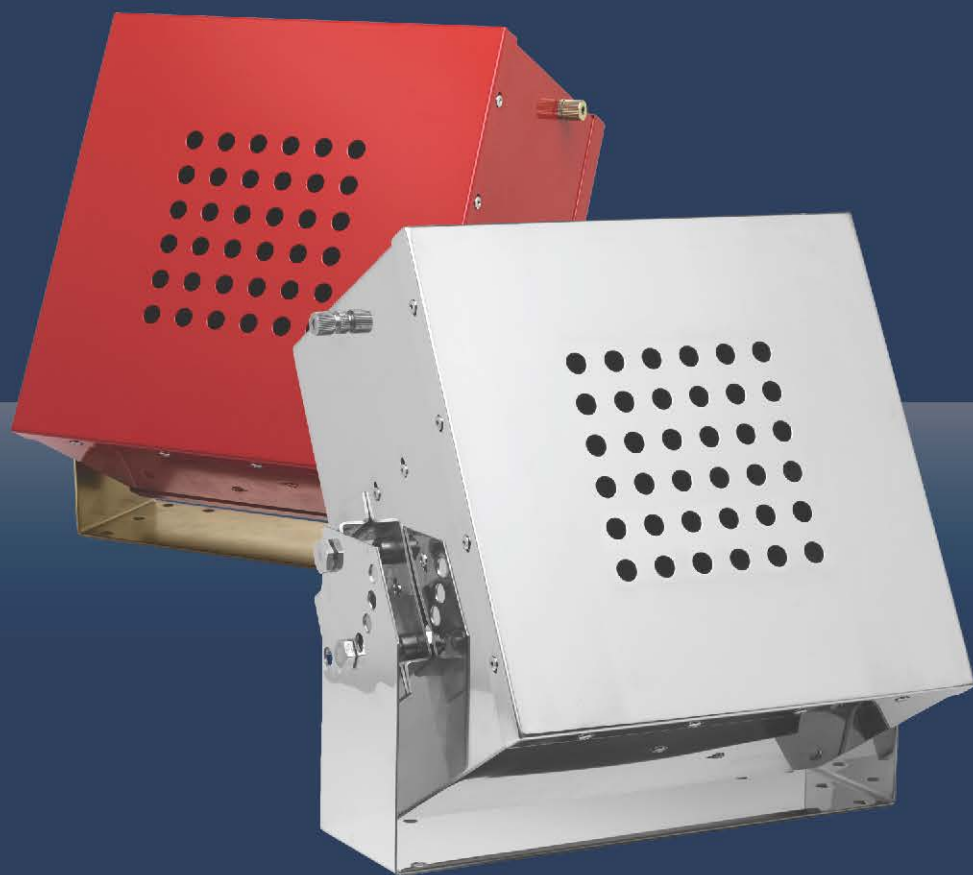

## ■ FP-2000

**Product Code: 10149**

Product Description: **FirePro Fire Extinguishing Generator FP-2000.**

**Features:**

- UL, KIWA, BSI, ActivFire Approved
- Carbon-Steel casing Red-coated

## ■ FP-2000T

**Product Code: 10317**

Product Description: **FirePro Fire Extinguishing Generator FP-2000T.**

**Features:**

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

## ■ FP-2000S

**Product Code: 10392**

Product Description: **FirePro Fire Extinguishing Generator FP-2000S.**

**Features:**

- UL, KIWA, BSI, ActivFire Approved
- Stainless steel casing

## ■ FP-2000TS

**Product Code: 10623**

Product Description: **FirePro Fire Extinguishing Generator FP-2000TS.**

**Features:**

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator
- Stainless steel casing

## TECHNICAL INFORMATION

<b>Model</b>	FP-2000 / FP-2000S / FP-2000T / FP-2000TS
<b>Activation mechanism</b>	Thermal Electrical (min 1.5V DC, 0.8A in 3-4 sec)
<b>Activator type</b>	Heating element with 2.3 ohm resistance
<b>Current intensity to be tested</b>	Maximum 5 mA
<b>Weight (gross)</b>	15500 g (excluding bracket)
<b>Mass of FPC compound</b>	2000 g
<b>Operational discharge time</b>	10 - 15 seconds
<b>Discharge length</b>	3.5 m
<b>Dimensions</b>	300 mm x 300 mm x 185 mm
<b>Fire class</b>	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets